George

WHAT ELSE?

An adept of refined products with modern design, ERARD has you in mind with this collection of TV stands available in 3 fashionable colors: cherry red, schist blue and moonstone grey. The GEORGE units come in 3 versions, 2 of which are fully controllable by remote control to raise and lower (LIFT®) or turn your screen from right to left (TWIST®) to watch television in the best conditions wherever you are in the room.





George


- DECORATIVE FURNITURE WITH COMPONENT INTEGRATION COMPARTMENT
- 3 models:
 - Fixed column: Ref. 2502 Ref. 2503, -Ref. 2504
 - Motorized TWIST® swivel: Ref. 2494 Ref. 2509 Ref. 2510
 - Motorized LIFT®: Ref. 2470 Ref. 2507 Ref. 2508
- Cables concealed in the column

- Room for 6 components
- Available in 3 colors: Schist blue / Cherry red / Moonstone grey
- Central chest to store cables (mains, power strips...), components and remote controls
- Retractable flap door covered with a fabric which enables infrared signals to pass through



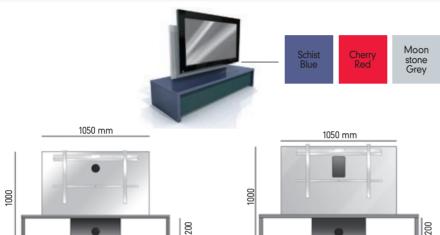







1000	540 mm	
D. C	000500	

George fixed	Ref.	002503
Cherry red	GENCOD	318528 002503 9
George fixed Moonstone grey	Ref.	002504
	GENCOD	318528 002504 6
George fixed Schist blue	Ref.	002502
	GENCOD	318528 002502 2

George TWIST®	Ref.	002509
Cherry red	GENCOD	318528 002509 1
George TWIST® Moonstone grey	Ref.	002510
	GENCOD	318528 002510 7
George TWIST® Schist blue	Ref.	002494
	GENCOD	318528 002494 0

George LIFT®	Ref.	002470
Cherry red	GENCOD	318528 002470 4
George LIFT®	Ref.	002508
Moonstone grey	GENCOD	318528 002508 4
George LIFT®	Ref.	002507
Schist blue	GENCOD	318528 002507 7





Ref. 2494 Ref. 2509 Ref. 2510 +/- 15°



Ref. 2470 Ref. 2507 Ref. 2508 675 mm run



50 KG



28

540 mm

30" - 50"



Up to 600x400 mm

- 3 screen height adjustment positions
- Lacquered MDF compartment 30 mm thick
- Vertical panel in felt grey decor 30 mm thick
- Retractable door made of open work mesh fabric (smooth grey)
- Horizontal distance between fixing points: min. = 5 cm, max. = 69 cm
- Vertical distance between fixing points: min. = 5 cm, max. = 44.5 cm

Guaranteed 10 years. (Ref. 2502 - Ref. 2503 - Ref. 2504).

Motorization components are guaranteed 2 years (Ref. 2470 - Ref. 2494 - Ref. 2507 - Ref. 2508 - Ref. 2509-Ref. 2510).